

CODE	360.XX.X.XX.X.X.X.X
PRODUCT DESCRIPTION	
DESCRIPTION	SINGLE LED PICTURE LIGHT - SOLO
CATEGORY	IP20 INTERIOR USE ONLY
MATERIAL	MACHINED ALUMINIUM
FINISH	WHITE BLACK ALU GOLD BRONZE CUSTOM
GEAR TYPE	1-10V DALI PHASE
ACCESSORIES	GLARE LOUVER
ROTATION	60° TILT

ARM TYPE		
1 - PICTURE LIGHT ARM	2 - SWAN NECK ARM	3 - STRAIGHT ARM


LIGHT ENGINE	
POWER	AS DETAILED BELOW
LUMENS	87 lm/W 3000K 80lm/W 2700K
COLOUR RENDERING	96CRI TYPICAL
COLOUR TEMP.	2700K (STANDARD) 3000K 4000K (ON REQUEST)
BEAM DISTRIBUTION	PICTURE WASH
LAMP LIFE	50,000hrs

PICTURE LIGHT ARM MOUNTING			
STANDARD	ALTERNATIVE MOUNTING OPTIONS		
5 - PICTURE LIGHT BRACKET	6 - JOINERY BUSH	8 - SURFACE BUSH ROUND	10 - PICTURE LIGHT SURFACE PLATE

EXAMPLE CODE

360	•	01	•	4	•	27	•	1	•	1	•	5	•	1
LUMINAIRE TYPE		LENGTH		FINISH		COLOUR TEMP		ARM LENGTH		ARM TYPE		MOUNTING		DIMMING PROTOCOL
360 - TM SOLO		01 - SOLO (2.3W)		1 - WHITE 9010 2 - BLACK 9005 3 - BRUSHED ALU 4 - GOLD P/C 5 - ANT. BRONZE PLATE 6 - BRONZE P/C C - CUSTOM		27 - 2700K (STANDARD) 30 - 3000K 40 - 4000K (CUSTOM)		4 - 300MM 7 - 450MM		1 - PICTURE LIGHT 2 - SWAN NECK 3 - STRAIGHT C - CUSTOM		5 - PICTURE LIGHT BRACKET (STANDARD) 6 - JOINERY BUSH 8 - SURFACE BUSH ROUND 9 - SURFACE BUSH SQUARE 10 - PICTURE LIGHT SURFACE PLATE C - CUSTOM		1 - LOCAL DIM (STANDARD) 2 - PHASE 3 - 0-10V/1-10V 4 - DALI

PRODUCT BENEFITS

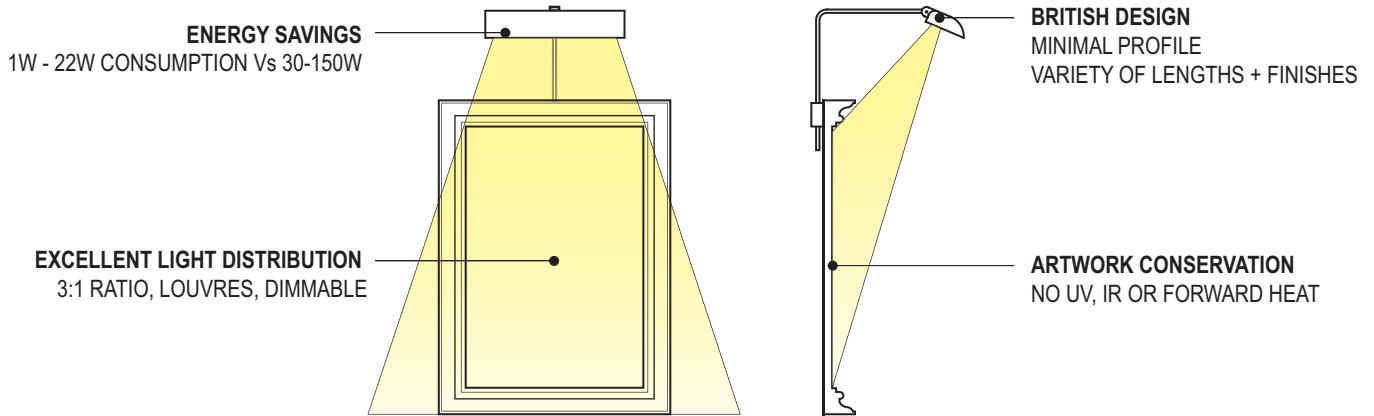

COLOUR RENDERING

Typical R values 2700K at 700mA, 25°C ambient.

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Ra
96	99	94	92	96	98	96	97	98	98	90	96	97	95	97	96

RELATIVE SPECTRAL EMISSION

