




### PRODUCT DESCRIPTION


<b>DESCRIPTION</b>	PROFESSIONAL MINI LED PICTURE LIGHT
<b>CATEGORY</b>	IP20 - FOR INDOOR USE ONLY
<b>MATERIAL</b>	MACHINED ALUMINIUM
<b>FINISH</b>	BRUSHED   POLISHED   ANODISED   PLATED
<b>DIMMING</b>	1-10V   DALI   PHASE   LOCAL DIM
<b>POWER SUPPLY</b>	REMOTE CONSTANT CURRENT
<b>ACCESSORIES</b>	N/A
<b>ROTATION</b>	60° TILT

### LIGHT ENGINE


<b>POWER</b>	AS DETAILED PER FIXING LENGTH
<b>CURRENT</b>	350-700mA CONSTANT CURRENT
<b>LUMENS</b>	87 lm/W 3000K   80lm/W 2700K
<b>COLOUR RENDERING</b>	96CRI typical
<b>COLOUR TEMP.</b>	2700K (std.)   3000K   4000K (on request)
<b>BEAM DISTRIBUTION</b>	PICTURE LIGHT WASH
<b>LAMP LIFE</b>	50,000hrs - LM70

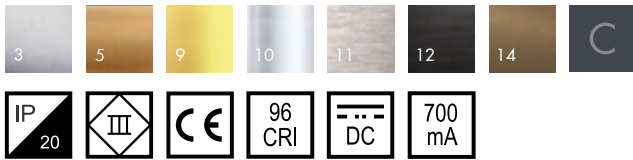


### DIMENSIONS

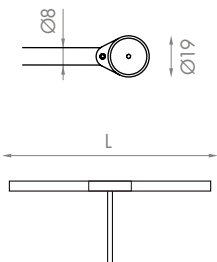

### ARM MOUNTING OPTIONS

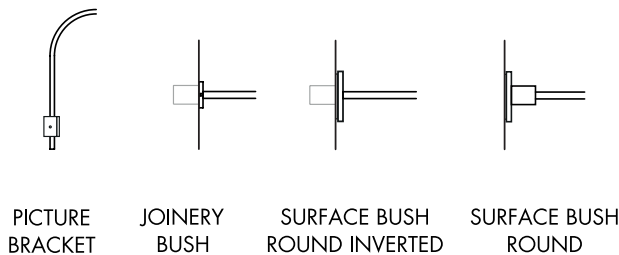

### ARM TYPE

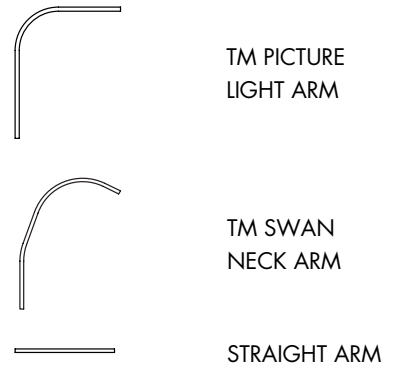

### PRODUCT CODE 390.XX.XX.XX.X.X.XX.X

LUMINAIRE TYPE	LENGTH	FINISH	COLOUR TEMP	ARM LENGTH	ARM TYPE	MOUNTING	DIMMING PROTOCOL
390. TM SLIMLIGHT PRO	01. 140mm	03. BRUSHED ALU	27. 2700K (std.)	1. 150mm	1. PICTURE LIGHT	05. PICTURE LIGHT BRACKET (std.)	1. 0-10V/1-10V
	02. 310mm	05. ANT. BRONZE PLATED	30. 3000K	2. 200mm	2. SWAN NECK	06. JOINERY BUSH	2. DALI
	03. 480mm	09. POLISHED BRASS	40. 4000K (custom)	3. 250mm	3. STRAIGHT	08. SURFACE BUSH ROUND	3. PHASE
	04. 640mm	10. POLISHED NICKEL		4. 300mm	4. CUSTOM	09. SURFACE BUSH SQUARE	4. LOCAL DIM (STANDARD)
	05. 820mm	11. BRUSHED NICKEL		5. 350mm		10. PICTURE LIGHT SURFACE PLATE	
	06. 990mm	12. BLACK ANODISED		6. 400mm			
	07. 1160mm	14. BRONZE ANODISED		7. 450mm			
	08. 1330mm	CU. CUSTOM					
	09. 1500mm						
	10. 1670mm						
	CU. CUSTOM						