


## PRODUCT DESCRIPTION

<b>DESCRIPTION</b>	GALLERY ACCENT LIGHT
<b>CATEGORY</b>	IP20 - INTERIOR USE ONLY
<b>MATERIAL</b>	MACHINED ALUMINIUM
<b>FINISH</b>	WHITE   BLACK   BRUSHED ALUMINIUM   CUSTOM
<b>GEAR TYPE</b>	SWITCHED TRACK WITH LOCAL DIMMER
<b>ACCESSORIES</b>	HONEYCOMB   LINEAR SPREAD   COLOUR   COLOUR ENHANCER
<b>ROTATION</b>	340° PAN   90° TILT
<b>WEIGHT</b>	1.2KG


## LIGHT ENGINE

<b>POWER</b>	16.7W
<b>CURRENT</b>	600mA
<b>LUMENS</b>	950lm @ 2700K   1000lm @ 3000K
<b>COLOUR RENDERING</b>	96CRI TYPICAL
<b>COLOUR TEMP.</b>	2700K (STANDARD)   3000K   4000K (ON REQUEST)
<b>BEAM DISTRIBUTION</b>	FWHM 9° (std.)
<b>OPTICAL ACCESSORIES</b>	17°   25°   36°   60°   10°x36°   10°x60°
<b>LAMP LIFE</b>	50,000hrs >70% LUMEN MAINTENANCE

## MOUNTING OPTIONS

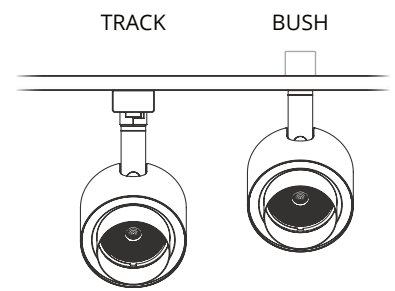

## ACCESSORIES

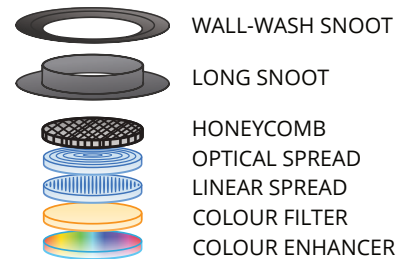

## PRODUCT CODE 150.16.X.XX.XX.X

150	16	1	27	09	2	1
LUMINAIRE TYPE	POWER	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	DIMMING PROTOC.
150 - GALLERYONEFIFTY	16 - 16.7W	1 - WHITE 9010 2 - BLACK 9005 3 - BRUSHED ALU C - CUSTOM	27 - 2700K (std.) 30 - 3000K 40 - 4000K (custom)	09 - 9° (std.) 17 - 17° 25 - 25° 36 - 36° 60 - 60° X3 - 10°x36° X6 - 10°x60°	1 - 230V TRACK 2 - JOINERY BUSH C - CUSTOM	1 - LOCAL DIM (std.) 2 - 0-10V COMPATIBLE 3 - DALI