



PRODUCT DESCRIPTION


DESCRIPTION	GALLERY ACCENT LIGHT
CATEGORY	IP20 - INTERIOR USE ONLY
MATERIAL	MACHINED ALUMINIUM
FINISH	WHITE BLACK BRUSHED ALUMINIUM CUSTOM
INTEGRAL GEAR	LOCAL DIM. DALI/1-10V COMING SOON
ACCESSORIES	HONEYCOMB LINEAR SPREAD COLOUR
ROTATION	340° PAN 90° TILT
WEIGHT	1.2KG

LIGHT ENGINE


POWER	21W
CURRENT	600mA
LUMENS	950lm @ 2700K 1000lm @ 3000K
COLOUR RENDERING	96CRI TYPICAL
COLOUR TEMP.	2700K (std.) 3000K 4000K (on request)
BEAM DISTRIBUTION	FMHW 9° (std.)
OPTICAL ACCESS.	17° 25° 36° 60° 10°x 36° 10°x 60°
LAMP LIFE	50,000HRS >70% LUMEN MAINTENANCE




DIMENSIONS

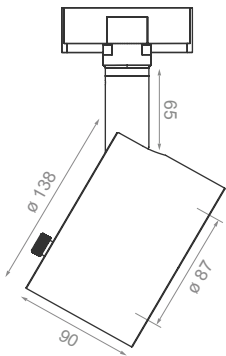

MOUNTING OPTIONS

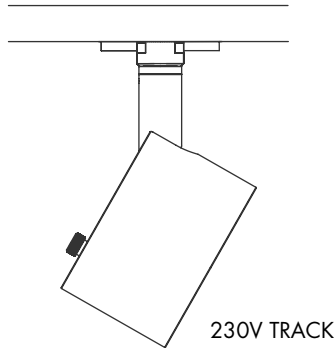

ACCESSORIES

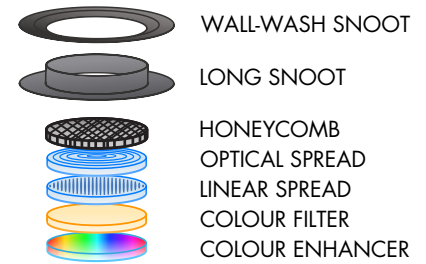

PRODUCT CODE G150.21.X.XX.XX.X.X



LUMINAIRE TYPE	POWER	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	DIMMING PROTOCOL
G150. GALLERY150	21. 21W	1. WHITE 9010 2. BLACK 9005 3. BRUSHED ALU C. CUSTOM	27. 2700K (std.) 30. 3000K 40. 4000K (custom)	09. 9° (std.) 17. 17° 25. 25° 36. 36° 60. 60° X3. 10°x 36° X6. 10°x 60°	1. 230V TRACK	1. LOCAL DIM (std.) 2. 0-10V 3. DALI