

### PRODUCT DESCRIPTION


<b>DESCRIPTION</b>	LED PICTURE LIGHT - CLASSIC STYLE
<b>CATEGORY</b>	IP20 - FOR INDOOR USE ONLY
<b>MATERIAL</b>	ALUMINIUM
<b>FINISH</b>	WHITE   BLACK   GOLD   PLATED FINISHES
<b>DIMMING</b>	1-10V   DALI   PHASE   LOCAL DIM
<b>POWER SUPPLY</b>	REMOTE CONSTANT CURRENT
<b>ACCESSORIES</b>	INTEGRAL ANTI-GLARE LOUVRE
<b>ROTATION</b>	60° TILT

### LIGHT ENGINE


<b>POWER OUTPUT</b>	DETAILED PER FIXING LENGTH
<b>POWER TYPE</b>	350mA CONSTANT CURRENT
<b>LAMP LUMENS</b>	81lm/W
<b>COLOUR RENDERING</b>	CRI 97 Typ.
<b>COLOUR TEMP.</b>	2700K   3000K   4000K
<b>BEAM DISTRIBUTION</b>	PICTURE LIGHT WASH
<b>LAMP LIFE</b>	100,000hours - LM70




### DIMENSIONS

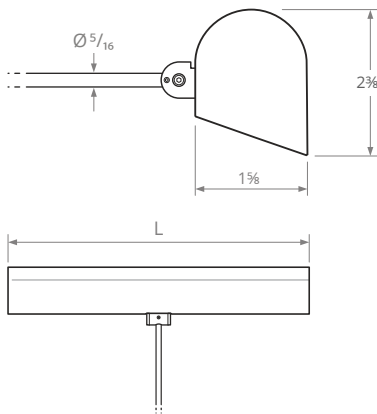

### ARM MOUNTING OPTIONS

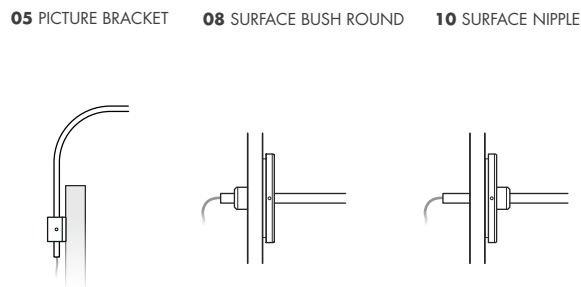

### ARM TYPE

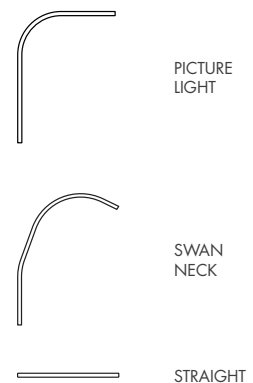

### PRODUCT CODE 350UL.XXX.XX.XX.X.X.XX

LUMINAIRE TYPE	LENGTH (L)	FINISH	COLOUR TEMP	ARM LENGTH	ARM TYPE	MOUNTING	REMOTE DRIVER
<b>350UL. TM CLASSIC</b>	010. 3 <sup>15</sup> / <sub>16</sub> in (1.2W)	01. WHITE 9010	27. 2700K	1.5 <sup>7</sup> / <sub>8</sub> in	1. PICTURE LIGHT	05. PICTURE BRACKET	+ 1-10V
	025. 9 <sup>13</sup> / <sub>16</sub> in (2.3W)	02. BLACK 9005	30. 3000K	2. 7 <sup>7</sup> / <sub>8</sub> in	2. SWAN NECK	06. JOINERY BUSH	+ DALI
	040. 15 <sup>3</sup> / <sub>4</sub> in (3.5W)	04. GOLD P/C	40. 4000K	3. 9 <sup>7</sup> / <sub>8</sub> in	3. STRAIGHT	08. SURFACE BUSH ROUND	+ PHASE
	055. 21 <sup>7</sup> / <sub>8</sub> in (4.6W)	05. ANTIQUE BRONZE		4. 11 <sup>7</sup> / <sub>8</sub> in	C. CUSTOM	10. SURFACE NIPPLE	
	070. 27 <sup>3</sup> / <sub>16</sub> in (5.7W)	06. BRONZE P/C		5. 13 <sup>7</sup> / <sub>8</sub> in			
	085. 33 <sup>7</sup> / <sub>16</sub> in (6.9W)	07. ANTIQUE BRASS		6. 15 <sup>7</sup> / <sub>8</sub> in			
	100. 39 <sup>3</sup> / <sub>8</sub> in (8.0W)	CU. CUSTOM		7. 17 <sup>7</sup> / <sub>8</sub> in			
	115. 45 <sup>1</sup> / <sub>4</sub> in (9.1W)						
	130. 51 <sup>3</sup> / <sub>16</sub> in (10.3W)						
	145. 57 <sup>1</sup> / <sub>16</sub> in (11.4W)						

## ARM CONFIGURATION

**HEAD TYPE** - Based on canvas width (w)


TYPE	CANVAS WIDTH	HEAD LENGTH	ARMS
010	Up to 9 7/8	3 15/16 in	1
025	9 7/8 - 17 5/8	9 13/16 in	1
040	17 5/8 - 23 5/8	15 3/4 in	1
055	23 5/8 - 29 1/2	21 5/8 in	1
070	29 1/2 - 35 3/8	27 9/16 in	1
085	35 3/8 - 41 1/4	33 7/16 in	2
100	41 1/4 - 47 1/4	39 3/8 in	2
115	47 1/4 - 53 1/8	45 1/4 in	2
130	53 1/8 - 59 1/8	51 3/16 in	3
145	59 1/8 - 66 7/8	57 1/16 in	3

Dimensions in inches

**ARM TYPE** - Based on canvas height (h)

TYPE	CANVAS HEIGHT	ARM
1	Up to 19 5/8	5 7/8 in
2	19 5/8 - 31 1/2	7 7/8 in
3	31 1/2 - 47 1/4	9 7/8 in
4	47 1/4 - 63"	11 7/8 in
5	63" - 78 3/4	13 7/8 in
6	78 3/4 - 98 3/8	15 7/8 in
7	98 3/8 - 118 1/8	17 7/8 in

Dimensions in inches

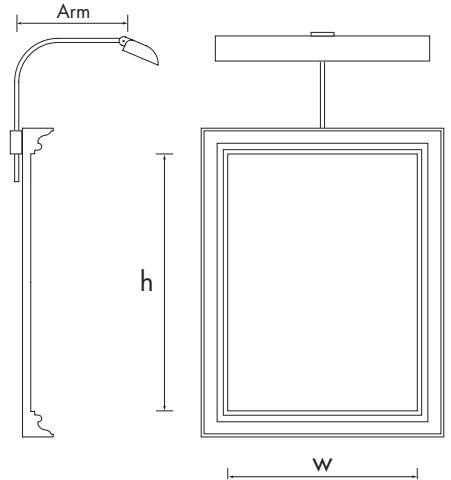



## PRODUCT OVERVIEW

### TYPICAL ENERGY SAVINGS

1W - 11W CONSUMPTION Vs 15W - 75W  
FOR AN EQUIVILANTLY SIZED INCANDESCENT  
PICTURE LIGHT

### EXCELLENT LIGHT DISTRIBUTION

3:1 RATIO, ADJUSTABLE, DIMMABLE

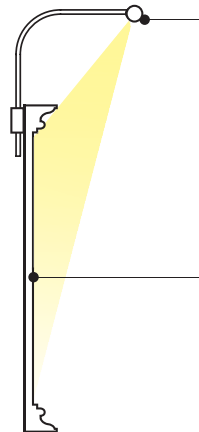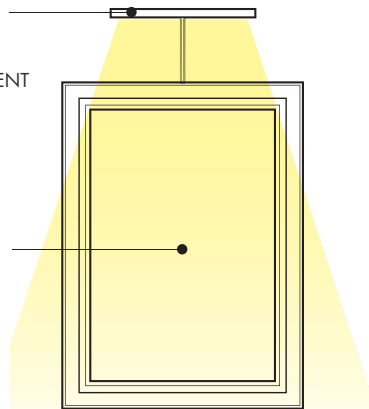

### BRITISH DESIGN

MINIMAL PROFILE  
VARIETY OF LENGTHS + FINISHES

### ARTWORK CONSERVATION



NO UV, IR OR FORWARD HEAT

## COLOUR RENDERING

Typical R values for 2700K at 350mA. 25°C ambient

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Ra
97	98	97	97	97	96	98	98	97	98	95	91	97	97	98	98

## RELATIVE SPECTRAL EMISSION

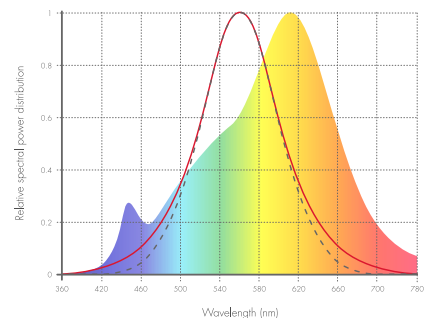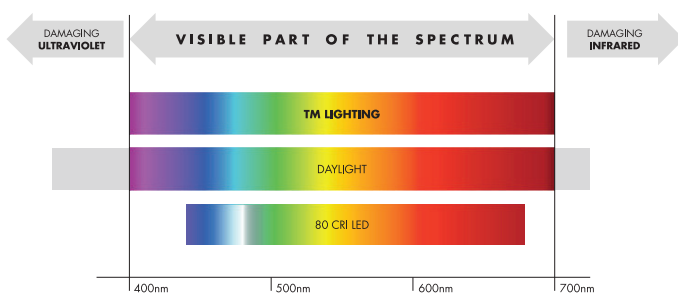

WIDTH (X)	TYPICAL POWER (350mA)	TYPICAL WIEGHT FOR STANDARD ASSEMBLY (Kg)	fV
$3^{15}/_{16}$	1.2 W	0.4 Kg	3.3 fV
$9^{13}/_{16}$	2.3 W	0.5 Kg	6.6 fV
$15^{3}/_{4}$	3.5 W	0.6 Kg	9.8 fV
$21^{5}/_{8}$	4.6 W	0.8 Kg	13.0 fV
$27^{9}/_{16}$	5.7 W	1.1 Kg	16.3 fV
$33^{7}/_{16}$	6.9 W	1.4 Kg	19.5 fV
$39^{3}/_{8}$	8.0 W	1.6 Kg	22.8 fV
$45^{1}/_{4}$	9.1 W	1.7 Kg	26.0 fV
$51^{3}/_{16}$	10.3 W	1.8 Kg	29.3 fV
$57^{1}/_{16}$	11.4 W	2.0 Kg	32.5 fV

