



PRODUCT DESCRIPTION


DESCRIPTION	LED PICTURE LIGHT - CLASSIC STYLE
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE BLACK GOLD PLATED FINISHES
DIMMING	1-10V DALI PHASE LOCAL DIM
POWER SUPPLY	REMOTE CONSTANT CURRENT
FEATURES	INTEGRAL ANTI-GLARE LOUVRE
ROTATION	60° TILT

LIGHT ENGINE


POWER OUTPUT	DETAILED PER FIXING LENGTH
POWER TYPE	350mA CONSTANT CURRENT
LAMP LUMENS	81lm/W
COLOUR RENDERING	CRI 97 Typ.
COLOUR TEMP.	2700K 3000K 4000K
BEAM DISTRIBUTION	PICTURE LIGHT WASH
LAMP LIFE	100,000hours - LM70




DIMENSIONS

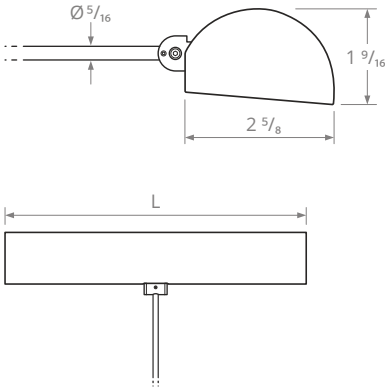

ARM MOUNTING OPTIONS

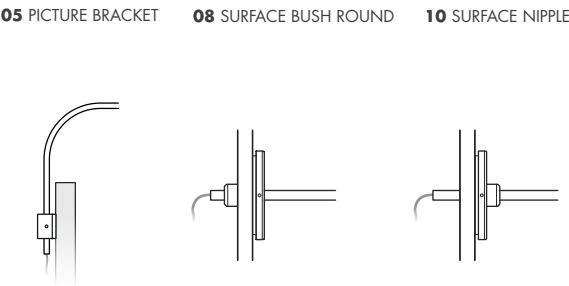

ARM TYPE

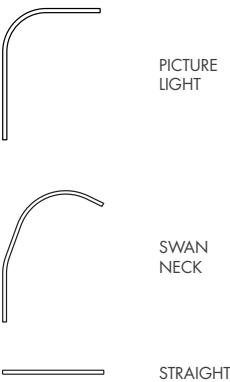

PRODUCT CODE 320UL.XXX.XX.XX.X.X.XX

LUMINAIRE TYPE	LENGTH (L)	FINISH	COLOUR TEMP	ARM LENGTH	ARM TYPE	MOUNTING	REMOTE DRIVER
320UL. TM GOODWOOD	010. 3 ¹⁵ / ₁₆ in (1.2W)	01. WHITE 9010	27. 2700K	1. 5 ⁷ / ₈ in	1. PICTURE LIGHT	05. PICTURE BRACKET	+ 1-10V
	025. 9 ¹³ / ₁₆ in (2.3W)	02. BLACK 9005	30. 3000K	2. 5 ⁷ / ₈ in	2. SWAN NECK	06. JOINERY BUSH	+ DALI
	040. 15 ³ / ₄ in (3.4W)	04. GOLD P/C	40. 4000K	3. 5 ⁷ / ₈ in	3. STRAIGHT	08. SURFACE BUSH ROUND	+ PHASE
	055. 21 ⁵ / ₈ in (4.6W)	05. ANTIQUE BRONZE		4. 11 ⁷ / ₈ in	C. CUSTOM	10. SURFACE NIPPLE	
	070. 27 ⁹ / ₁₆ in (5.7W)	06. BRONZE P/C		5. 13 ⁷ / ₈ in			
	085. 33 ⁷ / ₁₆ in (6.9W)	07. ANTIQUE BRASS		6. 15 ⁷ / ₈ in			
	100. 39 ³ / ₈ in (8.0W)	CU. CUSTOM		7. 17 ⁷ / ₈ in			
	115. 45 ¹ / ₄ in (9.1W)						
	130. 51 ³ / ₁₆ in (10.3W)						
	145. 57 ¹ / ₁₆ in (11.4W)						

ARM CONFIGURATION

HEAD TYPE - Based on canvas width (w)


TYPE	CANVAS WIDTH	HEAD LENGTH	ARMS
010	Up to 9 ⁷ / ₈	3 ¹⁵ / ₁₆ in	1
025	9 ⁷ / ₈ - 17 ⁵ / ₈	9 ¹³ / ₁₆ in	1
040	17 ⁵ / ₈ - 23 ⁵ / ₈	15 ³ / ₄ in	1
055	23 ⁵ / ₈ - 29 ¹ / ₂	21 ⁵ / ₈ in	1
070	29 ¹ / ₂ - 35 ³ / ₈	27 ⁹ / ₁₆ in	1
085	35 ³ / ₈ - 41 ¹ / ₄	33 ⁷ / ₁₆ in	2
100	41 ¹ / ₄ - 47 ¹ / ₄	39 ³ / ₈ in	2
115	47 ¹ / ₄ - 53 ¹ / ₈	45 ¹ / ₄ in	2
130	53 ¹ / ₈ - 59 ¹ / ₈	51 ³ / ₁₆ in	3
145	59 ¹ / ₈ - 66 ⁷ / ₈	57 ¹ / ₁₆ in	3

Dimensions in inches

ARM TYPE - Based on canvas height (h)

TYPE	CANVAS HEIGHT	ARM
1	Up to 19 ⁵ / ₈	5 ⁷ / ₈ in
2	19 ⁵ / ₈ - 31 ¹ / ₂	7 ⁷ / ₈ in
3	31 ¹ / ₂ - 47 ¹ / ₄	9 ⁷ / ₈ in
4	47 ¹ / ₄ - 63"	11 ⁷ / ₈ in
5	63" - 78 ³ / ₄	13 ⁷ / ₈ in
6	78 ³ / ₄ - 98 ³ / ₈	15 ⁷ / ₈ in
7	98 ³ / ₈ - 118 ¹ / ₈	17 ⁷ / ₈ in

Dimensions in inches

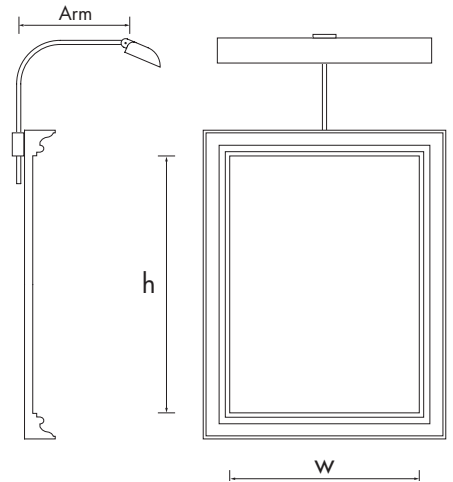


PRODUCT OVERVIEW

TYPICAL ENERGY SAVINGS

1W - 11W CONSUMPTION Vs 15W - 75W
FOR AN EQUIVILANTLY SIZED INCANDESCENT
PICTURE LIGHT

EXCELLENT LIGHT DISTRIBUTION

3:1 RATIO, ADJUSTABLE, DIMMABLE

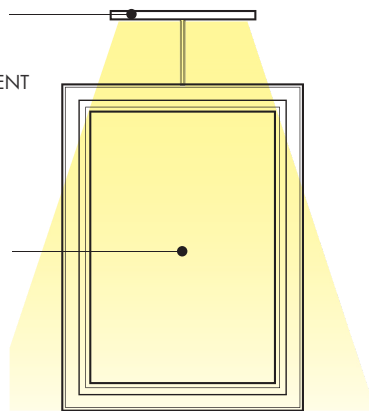


BRITISH DESIGN

MINIMAL PROFILE
VARIETY OF LENGTHS + FINISHES

ARTWORK CONSERVATION

NO UV, IR OR FORWARD HEAT


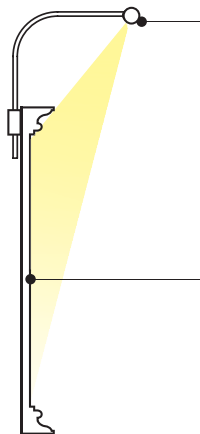


COLOUR RENDERING

Typical R values for 2700K at 350mA. 25°C ambient

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Ra
97	98	97	97	97	96	98	98	97	98	95	91	97	97	98	98

RELATIVE SPECTRAL EMISSION

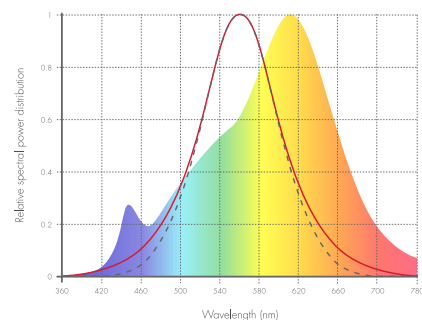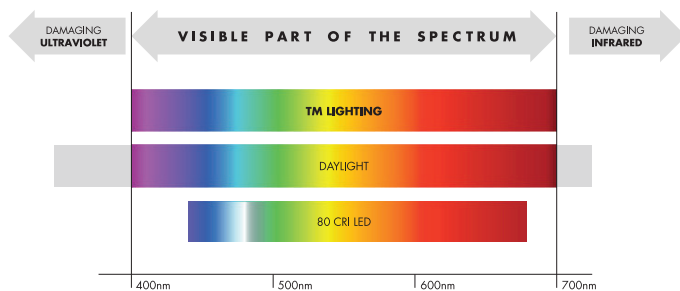

WIDTH (X)	TYPICAL POWER (350mA)	TYPICAL WIEGHT FOR STANDARD ASSEMBLY (Kg)	fV	
3 ¹⁵ / ₁₆	1.2 W	0.4 Kg	3.3 fV	
9 ¹³ / ₁₆	2.3 W	0.5 Kg	6.6 fV	
15 3/4	3.5 W	0.6 Kg	9.8 fV	
21 5/8	4.6 W	0.8 Kg	13.0 fV	
27 9/16	5.7 W	1.1 Kg	16.3 fV	
33 7/16	6.9 W	1.4 Kg	19.5 fV	
39 3/8	8.0 W	1.6 Kg	22.8 fV	
45 1/4	9.1 W	1.7 Kg	26.0 fV	
51 3/16	10.3 W	1.8 Kg	29.3 fV	
57 1/16	11.4 W	2.0 Kg	32.5 fV	