




## PRODUCT DESCRIPTION

<b>DESCRIPTION</b>	PUSH CONNECT ARTPOINT 24V SPOTLIGHT
<b>CATEGORY</b>	IP20 - FOR INDOOR USE ONLY
<b>MATERIAL</b>	MACHINED ALUMINIUM
<b>FINISH</b>	WHITE   BLACK   PLATED FINISHES
<b>DIMMING</b>	1-10V   DALI   PHASE
<b>POWER SUPPLY</b>	REMOTE 24V CONSTANT VOLTAGE
<b>ACCESSORIES</b>	REFER TO LISTED LENSES
<b>ROTATION</b>	340° PAN   90° TILT
<b>WEIGHT</b>	0.42KG


## LIGHT ENGINE

<b>POWER</b>	12.8W
<b>VOLTAGE</b>	24V CONSTANT VOLTAGE
<b>LAMP LUMENS</b>	1113lm
<b>COLOUR RENDERING</b>	CRI 98 Typ.
<b>COLOUR TEMP.</b>	2700K (std.)   3000K   4000K (on request)
<b>BEAM DISTRIBUTION</b>	FWHM 12°   26°   38°   57°
<b>LAMP LIFE</b>	50,000hours - LM70

## DIMENSIONS

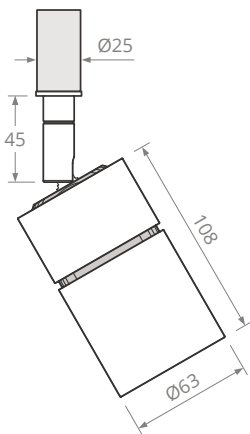

## MOUNTING OPTIONS

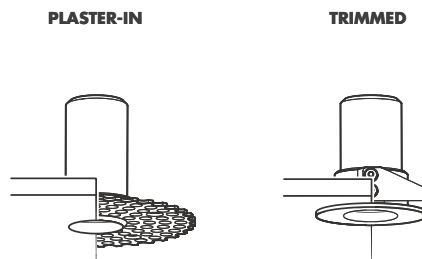

## ACCESSORIES

	<b>FROSTED LENS</b> 5031-0048
	<b>HONEYCOMB LOUVRE</b> 5031-0002
	<b>COLOUR LENSES</b> 5031-0052 – ¼ CTO
	<b>LINEAR LENSES</b> 5031-0108 – 10x36° 5031-0110 – 10x60°

## PRODUCT CODE 060.XX.XX.XX.XX

LUMINAIRE TYPE	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	REMOTE DRIVER (DIMMING)	ACCESSORIES
<b>060. ZEROSIXTY</b>	<b>01. WHITE 9010</b> 02. BLACK 9005 05. ANTIQUE BRONZE 07. ANTIQUE BRASS 0C. CUSTOM	<b>27. 2700K (std.)</b> 30. 3000K 40. 4000K (custom)	<b>01. 12°</b> 02. 26° 04. 38° 06. 57°	<b>03. ARTPOINT</b> *Refer to Artpoint specification sheet for mounting options.	<b>+ 1-10V</b> + DALI + PHASE	<b>+ FROSTED LENS</b> + HONEYCOMB LOUVRE + COLOUR LENS + LINEAR LENS 10x36° + LINEAR LENS 10x60°