




PRODUCT DESCRIPTION


DESCRIPTION	LINEAR LED GRAZING LIGHT
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE PC BLACK PC
DIMMING	1-10V DALI PHASE
POWER SUPPLY	REMOTE CONSTANT CURRENT
ACCESSORIES	ANTI-GLARE LOUVRE LV TAIL @ 300mm
ROTATION	180° TILT
WEIGHT	1.7kg PER LINEAR METER

LIGHT ENGINE

POWER	AS DETAILED PER FIXING LENGTH @ 700mA
CURRENT	350mA (std.) - 700mA (Max.)
LUMENS	188 lm/W
COLOUR RENDERING	95CRI typical
COLOUR TEMP.	2700K (std.) 3000K 4000K (on request)
BEAM DISTRIBUTION	14°
LAMP LIFE	50,000hours - LM70

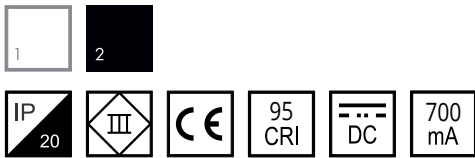

DIMENSIONS EXAMPLE SHOWN: 070

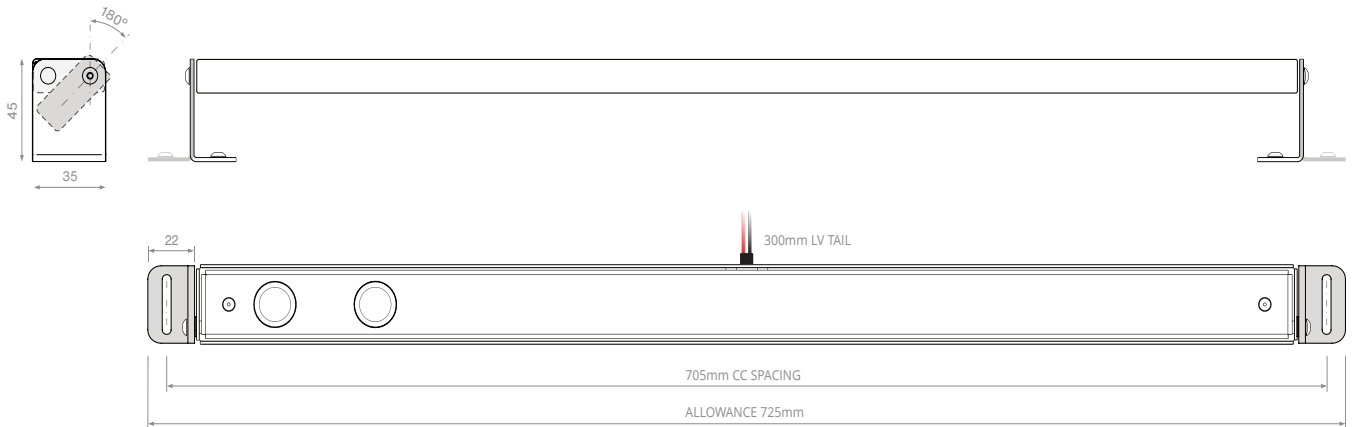

PRODUCT CODE 440.XXX.XX.XX.XX.XX

LUMINAIRE TYPE	ALLOWANCE	FINISH	COLOUR TEMP	DISTRIBUTION	CURRENT	MOUNTING	REMOTE DRIVER
440. TM LINEAR GRAZE	010. 125mm (4.6W)	02. BLACK 9005 (std.)	27. 2700K (std.)	14. 14°	35. 350mA (std.)	BI. BRACKET INTERNAL	+1-10V (std.)
	025. 275mm (9.0W)						
	040. 425mm (16.1W)		40. 4000K (custom)			CU. CUSTOM	+ PHASE
	055. 575mm (23.0W)						
	070. 725mm (29.9W)						
	085. 875mm (36.8W)						
	100. 1025mm (43.7W)						
	115. 1175mm (50.6W)						
	130. 1325mm (57.5W)						
	145. 1475mm (64.4W)						