



PRODUCT DESCRIPTION

DESCRIPTION	TRACK MOUNTED GALLERY ACCENT LIGHT
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE 9010 BLACK 9005
ADAPTOR FINISH	WHITE BLACK
DIMMING	LOCAL DIM PHASE
POWER SUPPLY	120V MAINS VOLTAGE
ACCESSORIES	SEE BELOW
ROTATION	340° PAN 90° TILT
WEIGHT	1.1 KG


LIGHT ENGINE

POWER	26W
LAMP LUMENS	2174lm
COLOUR RENDERING	CRI 98 Typ.
COLOUR TEMP.	2700K (std.) 3000K 4000K (on request)
BEAM DISTRIBUTION	FWHM 9° (std.)
OPTICAL ACCESSORIES	17° 25° 36° 60° 10 x 36° 10 x 60°
LAMP LIFE	100,000hours - LM70




DIMENSIONS

120V TRACK

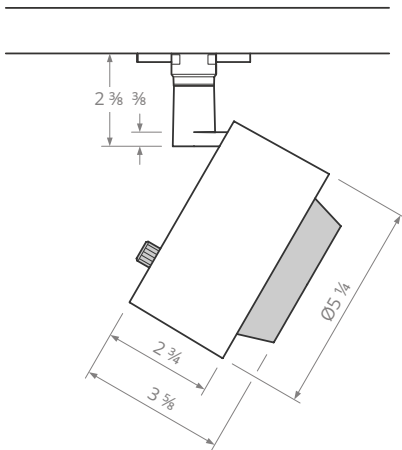

ACCESSORIES

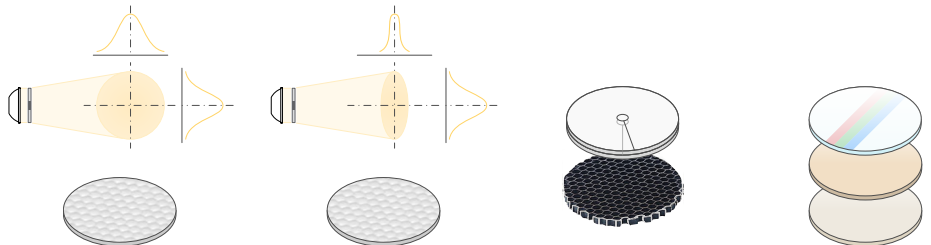

BEAM WIDTH LENSES

- 5031 - 0088 - A 17° NARROW
- 5031 - 0074 - A 25° NARROW FLOOD
- 5031 - 0078 - A 36° FLOOD
- 5031 - 0077 - A 60° FLOOD

BEAM SHAPING LENSES

- 5031 - 0073 - A 10°x36° LINEAR
- 5031 - 0090 - A 10°x60° LINEAR
- 5031 - 0089 - A 36°x36° SQUARE

BEAM CONTROL LENSES

- 5031 - 0112 - A BEAM AIMING
- 5031 - 0075 - A HONEYCOMB LOUVRE

COLOUR LENSES

- 5031 - 0109 - A 1/2 CTO
- 5031 - 0076 - A 1/4 CTO
- 5031 - 0113 - A CLEAR*

PRODUCT CODE G130U.AA.BB.CC.DD.E

LUMINAIRE TYPE

G130U. GALLERY 130

AA - FINISH

- 01. WHITE 9010
- 02. BLACK 9005
- CU. CUSTOM

BB - COLOUR TEMP

- 27. 2700K (std.)
- 30. 3000K
- 40. 4000K (Custom)

CC - DISTRIBUTION

- 09. 9° (std.)
- 17. 17°
- 25. 25°
- 36. 36°
- 60. 60°
- X3. 10°x36° LINEAR
- X6. 10°x60° LINEAR

DD - MOUNTING

- 01. MAINTRACK
- * Refer to Mains Track specification sheet for track options.

E - DIMMING PROTOCOL

- 3. PHASE
- 4. LOCAL DIM

* To be used with colour gels