



PRODUCT DESCRIPTION

DESCRIPTION	TRACK MOUNTED GALLERY ACCENT LIGHT
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE 9010 BLACK 9005
ADAPTOR FINISH	WHITE BLACK
DIMMING	LOCAL DIM PHASE
POWER SUPPLY	120V MAINS VOLTAGE
ACCESSORIES	SEE BELOW
ROTATION	340° PAN 90° TILT
WEIGHT	1.1 KG


LIGHT ENGINE

POWER	26W
LAMP LUMENS	2174lm
COLOUR RENDERING	CRI 98 Typ.
COLOUR TEMP.	2700K 3000K 4000K
BEAM DISTRIBUTION	FWHM 9° (std.)
OPTICAL ACCESSORIES	17° 25° 36° 60° 10° x 36° 10° x 60°
LAMP LIFE	100,000hours - LM70



DIMENSIONS

120V TRACK

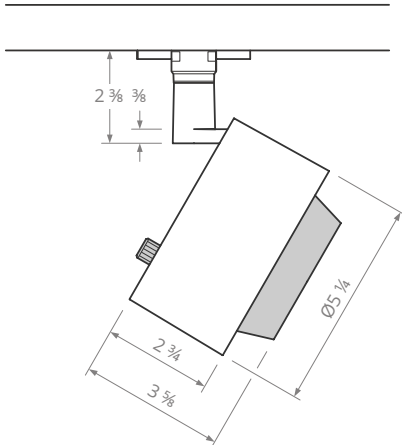

ACCESSORIES

BEAM WIDTH LENSES	BEAM SHAPING LENSES	BEAM CONTROL LENSES	COLOUR LENSES
5031 - 0088 - A 17° NARROW	5031 - 0073 - A 10°x36° LINEAR	5031 - 0112 - A BEAM AIMING	5031 - 0109 - A 1/2 CTO
5031 - 0074 - A 25° NARROW FLOOD	5031 - 0090 - A 10°x60° LINEAR	5031 - 0075 - A HONEYCOMB LOUVRE	5031 - 0076 - A 1/4 CTO
5031 - 0078 - A 36° FLOOD	5031 - 0089 - A 36°x36° SQUARE		5031 - 0113 - A CLEAR*
5031 - 0077 - A 60° FLOOD			

PRODUCT CODE G130UL.AA.BB.CC.DD.E

LUMINAIRE TYPE	AA - FINISH	BB - COLOUR TEMP	CC - DISTRIBUTION	DD - MOUNTING	E - DIMMING PROTOCOL
G130UL. GALLERY 130	01. WHITE 9010 02. BLACK 9005 CU. CUSTOM	27. 2700K 30. 3000K 40. 4000K	09. 9° 17. 17° 25. 25° 36. 36° 60. 60° X3. 10°x36° LINEAR X6. 10°x60° LINEAR	01. MAINTRACK * Refer to Mains Track specification sheet for track options.	3. PHASE 4. LOCAL DIM

* To be used with colour gels