



PRODUCT DESCRIPTION

DESCRIPTION	TRACK MOUNTED GALLERY ACCENT LIGHT
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE 9010 BLACK 9005
ADAPTOR FINISH	WHITE BLACK
DIMMING	LOCAL DIM DALI PHASE CASAMBI
POWER SUPPLY	230V MAINS VOLTAGE
ACCESSORIES	SEE BELOW
ROTATION	340° PAN 90° TILT
WEIGHT	1.1 KG


LIGHT ENGINE

POWER	26W
LAMP LUMENS	2174lm
COLOUR RENDERING	CRI 98 Typ.
COLOUR TEMP.	2700K 3000K 4000K
BEAM DISTRIBUTION	FWHM 9°
OPTICAL ACCESSORIES	17° 25° 36° 60° 10 x 36° 10 x 60°
LAMP LIFE	100,000hours - LM70




DIMENSIONS

230V TRACK

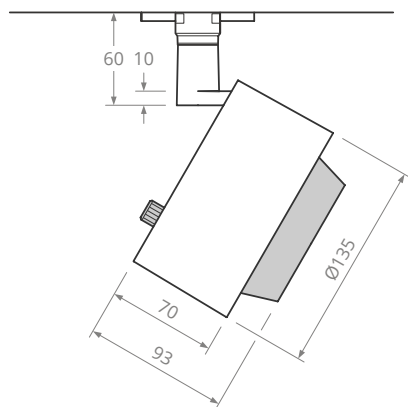

ACCESSORIES

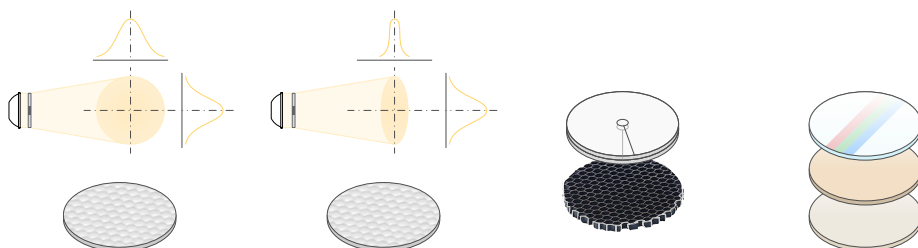

BEAM WIDTH LENSES

5031 - 0088 - A	17° NARROW
5031 - 0074 - A	25° NARROW FLOOD
5031 - 0078 - A	36° FLOOD
5031 - 0077 - A	60° FLOOD

BEAM SHAPING LENSES

5031 - 0073 - A	10°x36° LINEAR
5031 - 0090 - A	10°x60° LINEAR

BEAM CONTROL LENSES

5031 - 0112 - A	BEAM AIMING
5031 - 0075 - A	HONEYCOMB LOUVRE

COLOUR LENSES

5031 - 0109 - A	1/2 CTO
5031 - 0076 - A	1/4 CTO
5031 - 0113 - A	CLEAR*

PRODUCT CODE

G130.AA.BB.CC.DD.E

LUMINAIRE TYPE	AA - FINISH	BB - COLOUR TEMP	CC - DISTRIBUTION	DD - MOUNTING	E - DIMMING PROTOCOL
G130. GALLERY 130	01. WHITE 9010 02. BLACK 9005 CU. CUSTOM	27. 2700K 30. 3000K 40. 4000K	09. 9° 17. 17° 25. 25° 36. 36° 60. 60° X3. 10°x36° LINEAR X6. 10°x60° LINEAR	01. MAINTRACK * Refer to Mains Track specification sheet for track options.	2. DALI 3. PHASE 4. LOCAL DIM 7. CASAMBI

* To be used with colour gels