




PRODUCT DESCRIPTION


DESCRIPTION	RECESSED FRAMING PROJECTOR
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM
FINISH	WHITE 9010 BLACK 9005
ADAPTOR FINISH	WHITE BLACK
DIMMING	1-10V DALI CASAMBI SWITCHED
POWER SUPPLY	230V MAINS VOLTAGE
ROTATION	360° PAN 0° - 55° TILT
WEIGHT	1.8 KG

LIGHT ENGINE

POWER	19.8W
LAMP LUMENS	1750lm @ 3000K
COLOUR RENDERING	CRI 98 Typ.
COLOUR TEMP.	2700K 3000K 4000K
BEAM DISTRIBUTION	18 - 32° 53°
LAMP LIFE	100,000hours - LM70

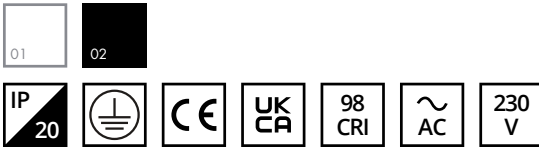

DIMENSIONS

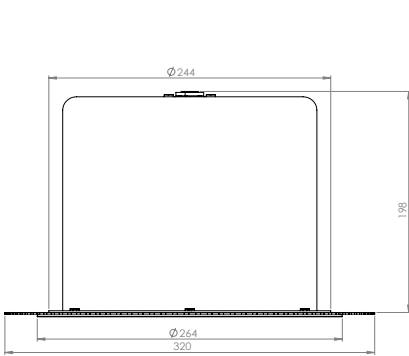

OPTIONS

01. FOCUS

Distance from Luminaire	Light Spot Diameter
1m	Ø 1.00m
2m	Ø 2.00m
3m	Ø 3.00m
4m	Ø 4.00m


02. ZOOM & FOCUS

Distance from Luminaire	Light Spot Diameter
1m	Min - Ø 0.38m Max - Ø 0.61m
2m	Min - Ø 0.73m Max - Ø 1.21m
3m	Min - Ø 1.08m Max - Ø 1.81m
4m	Min - Ø 1.43m Max - Ø 2.41m


01. BEAK PLATE



02. SLOT PLATE



03. HOLE PLATE



PRODUCT CODE RF85.XX.XX.XX.XX.XX.X

LUMINAIRE TYPE	FINISH	COLOUR TEMP	DISTRIBUTION	TARGETING	MOUNTING	COVER PLATE	DIMMING PROTOCOL
RF85. RECESSED FRAMER	01. WHITE 9010	27. 2700K	01. FOCUS	01. WALL	01. PLASTER-IN	01. BEAK PLATE	1. 1-10V
	02. BLACK 9005	30. 3000K	02. ZOOM & FOCUS	02. FLOOR	02. TRIMMED	02. SLOT PLATE	2. DALI
		40. 4000K				03. HOLE PLATE	4. LOCAL DIM (std.)
							7. CASAMBI