


PRODUCT DESCRIPTION

DESCRIPTION	RECESSED FRAMING PROJECTOR
CATEGORY	IP20 - FOR INDOOR USE ONLY
MATERIAL	ALUMINIUM & STEEL
FINISH	WHITE 9010 BLACK 9005 ACID ETCHED
DIMMING	1-10V DALI PHASE LOCAL
POWER SUPPLY	120V MAINS VOLTAGE, 60Hz
ROTATION	360° PAN 0° - 55° TILT
WEIGHT	5.8KG




LIGHT ENGINE

POWER	23W
CRI	CRI 98 Typ.
BEAM DISTRIBUTION	Focus: 53° Zoom&Focus: 18° - 32°
COLOR TEMP.	2700K @ 1486lm
LAMP LUMENS	3000K @ 1576lm
	4000K @ 1665lm

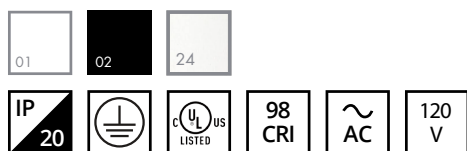

DIMENSIONS

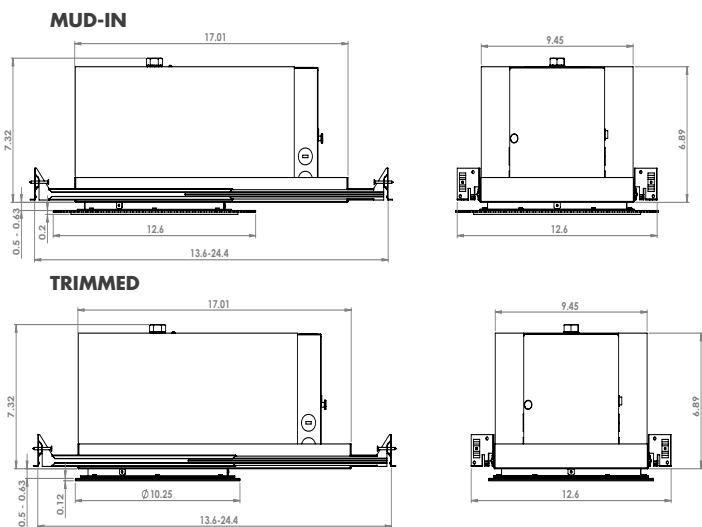

OPTIONS

01. FOCUS

Distance from Luminaire	Light Spot Diameter
1m	Ø 1.00m
2m	Ø 2.00m
3m	Ø 3.00m
4m	Ø 4.00m

02. ZOOM & FOCUS

Distance from Luminaire	Light Spot Diameter
1m	Min - Ø 0.38m Max - Ø 0.61m
2m	Min - Ø 0.73m Max - Ø 1.21m
3m	Min - Ø 1.08m Max - Ø 1.81m
4m	Min - Ø 1.43m Max - Ø 2.41m


01. BEAK PLATE



02. SLOT PLATE



03. HOLE PLATE



PRODUCT CODE

RF85UL.AA.BB.CC.DD.EE.F

LUMINAIRE TYPE	FINISH	COLOR TEMP.	DISTRIBUTION	MOUNTING	FOCUSING LOUVRE	DIMMING PROTOCOL
RF85UL RECESSED FRAMER	01. WHITE RAL9010 02. BLACK RAL9005 24. ACID ETCH PRIMED	27. 2700K 30. 3000K 40. 4000K	01. FOCUS 02. ZOOM & FOCUS	01. MUD-IN 02. TRIMMED	01. BEAK (Wall Illumination) 02. SLOT (Wall Illumination) 03. HOLE (Floor Illumination)	1. 1-10V 2. DALI 3. PHASE 4. LOCAL