



PRODUCT DESCRIPTION


| | |
|-----------------------|------------------------------------|
| DESCRIPTION | TRACK MOUNTED GALLERY ACCENT LIGHT |
| CATEGORY | IP20 - FOR INDOOR USE ONLY |
| MATERIAL | ALUMINIUM |
| FINISH | WHITE 9010 BLACK 9005 |
| ADAPTOR FINISH | WHITE BLACK |
| DIMMING | LOCAL DIM 1-10V DALI PHASE |
| POWER SUPPLY | 230V MAINS VOLTAGE |
| ACCESSORIES | SEE BELOW |
| ROTATION | 340° PAN 90° TILT |
| WEIGHT | 1.1 KG |

LIGHT ENGINE


| | |
|----------------------------|---|
| POWER | 26W |
| LAMP LUMENS | 2174lm |
| COLOUR RENDERING | CRI 98 Typ. |
| COLOUR TEMP. | 2700K (std.) 3000K 4000K (on request) |
| BEAM DISTRIBUTION | FWHM 9° (std.) |
| OPTICAL ACCESSORIES | 17° 25° 36° 60° 10 x 36° 10 x 60° |
| LAMP LIFE | 50,000hours - LM70 |



DIMENSIONS

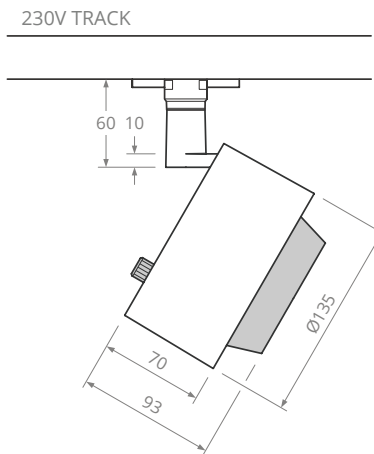

ACCESSORIES

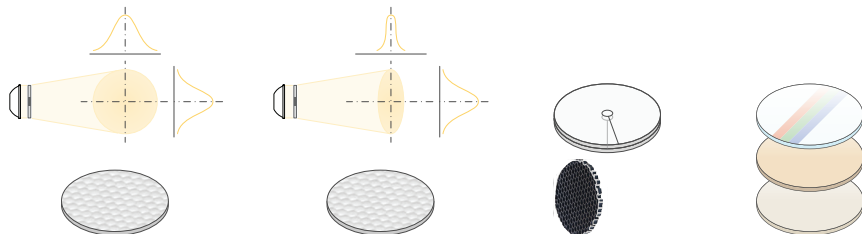

| | | | |
|----------------------------|----------------------------|----------------------------|----------------------|
| BEAM WIDTH LENSES | BEAM SHAPING LENSES | BEAM CONTROL LENSES | COLOUR LENSES |
| XXX.XXX - 17° NARROW | XXX.XXX - 10x36° LINEAR | XXX.XXX - BEAM AIMING | XXX.XXX - 1/2 CTO |
| XXX.XXX - 25° NARROW FLOOD | XXX.XXX - 10x60° LINEAR | XXX.XXX - H/C LOUVRE | XXX.XXX - 1/4 CTO |
| XXX.XXX - 36° FLOOD | XXX.XXX - 36x36° SQUARE | | XXX.XXX - CLEAR* |
| XXX.XXX - 60° WIDE FLOOD | | | |

PRODUCT CODE G130.XX.XX.XX.X

| | | | | | |
|-----------------------|----------------------------------|---|---|---------------------|--|
| LUMINAIRE TYPE | FINISH | COLOUR TEMP | DISTRIBUTION | MOUNTING | DIMMING PROTOCOL |
| G130. GALLERY 130 | 01. WHITE 9010 02. BLACK 9005 | 27. 2700K (std.) 30. 3000K 40. 4000K (custom) | 09. 9° (std.) 17. 17° 25. 25° 36. 36° 60. 60° X3. 10x36° LINEAR X6. 10x60° LINEAR | 01. 230V MAINSTRACK | 1. LOCAL DIM (std.) 2. 1-10V 3. DALI 4. PHASE |

* To be used with colour gels