



**PRODUCT DESCRIPTION**


<b>DESCRIPTION</b>	LOW VOLTAGE TRACK MOUNTED LED ACCENT LIGHT
<b>CATEGORY</b>	IP20 - INTERIOR USE ONLY
<b>MATERIAL</b>	MACHINED ALUMINIUM
<b>FINISH</b>	WHITE   BLACK   BRUSHED ALUMINIUM   CUSTOM
<b>ADAPTOR FINISH</b>	WHITE   BLACK
<b>DIMMING</b>	1-10V   DALI   LOCAL DIM (INTEGRAL)
<b>POWER SUPPLY</b>	REMOTE 48V CONSTANT VOLTAGE
<b>ACCESSORIES</b>	HONEYCOMB   FROSTED   COLOUR
<b>ROTATION</b>	340° PAN   90° TILT
<b>WEIGHT</b>	0.19KG

**LIGHT ENGINE**


<b>POWER</b>	1.6W
<b>VOLTAGE</b>	48V CONSTANT VOLTAGE
<b>LUMENS</b>	130lm
<b>COLOUR RENDERING</b>	96CRI typical
<b>COLOUR TEMP.</b>	2700K (std.)   3000K   4000K (on request)
<b>BEAM DISTRIBUTION</b>	FMHW 14°   30°   50°
<b>LAMP LIFE</b>	50,000hrs




**DIMENSIONS**

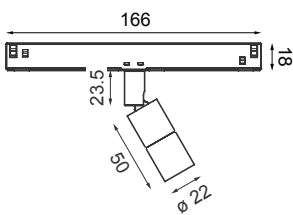

**TRACK OPTIONS**

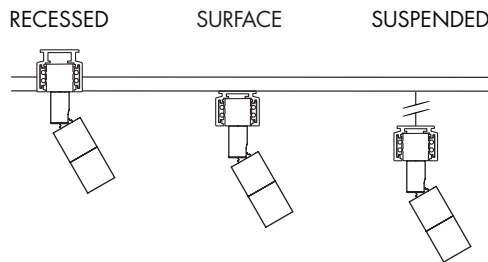

**ACCESSORIES**



**PRODUCT CODE** 020.01.X.XX.XX.XX.X

LUMINAIRE TYPE	POWER	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	DIMMING PROTOCOL
<b>020. ZEROTWENTY</b>	<b>01. 1.6W</b>	<b>1. WHITE 9010</b> 2. BLACK 9005 3. BRUSHED ALU 5. ANTIQUE BRONZE C. CUSTOM	<b>27. 2700K (std.)</b> 30. 3000K 40. 4000K (custom)	<b>01. 14°</b> 03. 30° 05. 50°	<b>04. 48V TRACK</b> *Refer to LV Track specification sheet for mounting options	<b>1. 0-10V/1-10V (std.)</b> 2. DALI 4. LOCAL DIM (on request)