




PRODUCT DESCRIPTION

DESCRIPTION	SIDE MOUNTED LED ACCENT LIGHT
CATEGORY	IP20 - INTERIOR USE ONLY
MATERIAL	MACHINED ALUMINIUM
FINISH	WHITE BLACK BRUSHED ALUMINIUM CUSTOM
DIMMING	1-10V DALI PHASE
POWER SUPPLY	REMOTE CONSTANT CURRENT
ACCESSORIES	HONEYCOMB FROSTED COLOUR
ROTATION	340° PAN 90° TILT
WEIGHT	0.3KG


LIGHT ENGINE

POWER	3.9W
CURRENT	1200mA CONSTANT CURRENT
LUMENS	2700K - 275lm 3000K - 300lm 4000K - 320lm
COLOUR RENDERING	96CRI typical
COLOUR TEMP.	2700K (std.) 3000K 4000K (on request)
BEAM DISTRIBUTION	FMHW 12° 20° 30°
LAMP LIFE	50,000hrs


DIMENSIONS

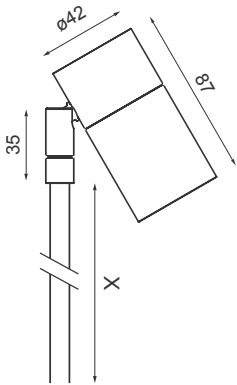

MOUNTING OPTIONS

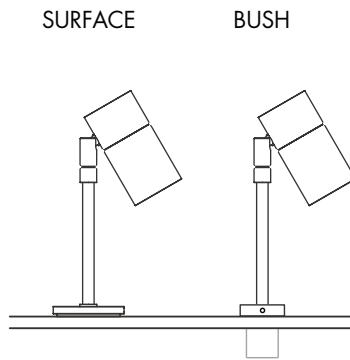

ACCESSORIES

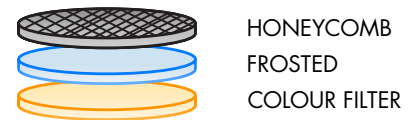

PRODUCT CODE 041.04.X.XX.XX.XX.X

LUMINAIRE TYPE	POWER	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	DIMMING PROTOCOL
041. ZEROFORTYONE	04. 3.9W	1. WHITE 9010 2. BLACK 9005 3. BRUSHED ALU 5. ANTIQUE BRONZE C. CUSTOM	27. 2700K (std.) 30. 3000K 40. 4000K (custom)	01. 12° 02. 20° 03. 30°	02. SURFACE PLATE 06. JOINERY BUSH 08. SURFACE BUSH ROUND 09. SURFACE BUSH SQUARE	1. 0-10V/1-10V (std.) 2. DALI 3. PHASE