




**PRODUCT DESCRIPTION**

<b>DESCRIPTION</b>	LOW VOLTAGE SPOTLIGHT WITH PUSH CONNECTION
<b>CATEGORY</b>	IP20 - INTERIOR USE ONLY
<b>MATERIAL</b>	MACHINED ALUMINIUM
<b>FINISH</b>	WHITE   BLACK   BRUSHED ALUMINIUM   CUSTOM
<b>DIMMING</b>	1-10V   DALI
<b>POWER SUPPLY</b>	REMOTE 24V CONSTANT VOLTAGE
<b>ACCESSORIES</b>	HONEYCOMB   FROSTED   COLOUR
<b>ROTATION</b>	340° PAN   90° TILT
<b>WEIGHT</b>	0.37KG


**LIGHT ENGINE**

<b>POWER</b>	8W
<b>VOLTAGE</b>	24V CONSTANT VOLTAGE
<b>LUMENS</b>	550lm
<b>COLOUR RENDERING</b>	96CRI typical
<b>COLOUR TEMP.</b>	2700K (std.)   3000K   4000K (on request)
<b>BEAM DISTRIBUTION</b>	FMHW 12°   35°   51°
<b>LAMP LIFE</b>	50,000hrs


**DIMENSIONS**

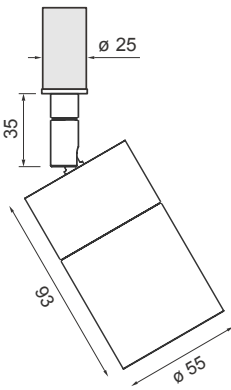

**ARTPOINT OPTIONS**

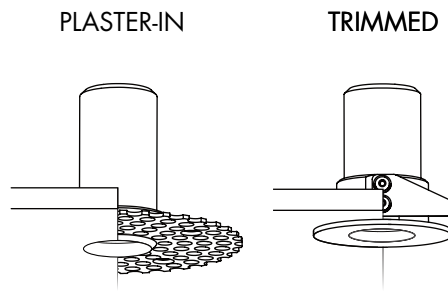

**ACCESSORIES**



**PRODUCT CODE** 050.08.X.XX.X.X

LUMINAIRE TYPE	POWER	FINISH	COLOUR TEMP	DISTRIBUTION	MOUNTING	DIMMING PROTOCOL
050. ZEROFIFTY	08. 8W	1. WHITE 9010 2. BLACK 9005 3. BRUSHED ALU 5. ANTIQUE BRONZE C. CUSTOM	27. 2700K (std.) 30. 3000K 40. 4000K (custom)	01. 12° 03. 35° 05. 51°	03. ARTPOINT *Refer to Arpoint specification sheet for mounting options	1. 0-10V/1-10V (std.) 2. DALI